

DISC PLOUGH ROUND FRAME

DP



agromaster®
We know the soil

www.agromaster.com

DP 2
DP 3
DP 4
DP 5
DP 6

DP, Disc Plough Round Frame

This machine is mounted to tractor's hydraulic lifting unit and universal three point linkage system. Round frame disc plough is manufactured with 170x7 mm round frame as 2, 3, 4, 5 and 6 discs. 660x6 mm or 710x6 mm diameter discs are made with 50-52 rh hardness corrosion-proof steel and resistance to cracking. The discs can be adjusted according to the soil conditions by means of position and direction angle.



Mud Scraper
Adjustable mud scrapers are placed in the machines so as to prevent accumulation of the mud.



Furrow Wheel





Position Angle
Disc has two positions, one of them is direction angle and the other one is position angle. Position angle is adjusted from the slots on disc brackets.

Technical Specifications*	Unit	DP 2	DP 3	DP 4	DP 5	DP 6
Number of Disc	pcs	2	3	4	5	6
Total Width (W)	mm	1115	1265	1420	1570	1720
	ft.in	3'8"	4'2"	4'8"	5'2"	5'8"
Total Length (L)	mm	1560	2130	2520	2910	3300
	ft.in.	5'1"	6'12"	8'3"	9'7"	10'10"
Total Height (H)	mm	1235	1235	1235	1235	1235
	ft.in	4'1"	4'1"	4'1"	4'1"	4'1"
Working Depth (Max.)	mm	250	250	250	250	250
	ft.in.	10"	10"	10"	10"	10"
Working Width	mm	660	990	1320	1650	1980
	ft.in.	2'2"	3'3"	4'4"	5'5"	6'6"
Space Between Bodies (B)	mm	530	530	530	530	530
	ft.in.	1'9"	1'9"	1'9"	1'9"	1'9"
Dia of Disc	mm	660	660	660	660	660
	ft.in.	2'2"	2'2"	2'2"	2'2"	2'2"
Dia of Disc (optional)	mm	710	710	710	710	710
	ft.in.	2'4"	2'4"	2'4"	2'4"	2'4"
Category		I	II	II	II	II-III
Required Power	hp	35-40	55-60	70-80	85-90	100-110
Weight	kg	310	410	470	540	610
	lbs	683	903	1036	1190	1344

1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inch

* Manufacturer reserves rights to change them without notice.

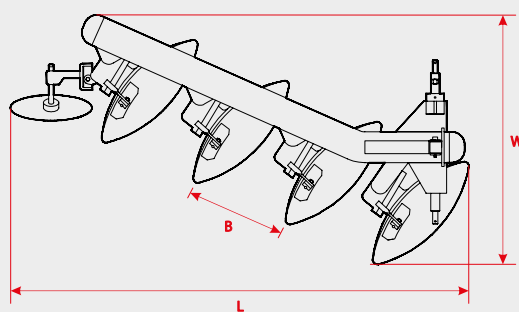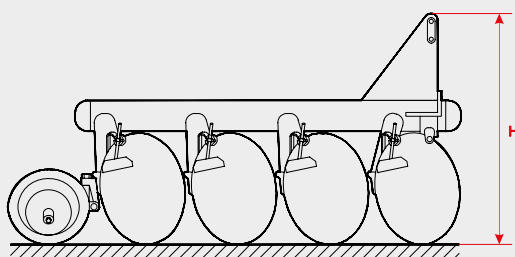



agromaster®

+90 332 235 64 23

info@agromaster.com

www.agromaster.com

Buyukkayacik OSB Mahallesi Evrenkoy Cad. No:32 42050 Selcuklu/Konya/TÜRKİYE

