

TUBULAR FRAME CULTIVATORS

KB TUBULAR



agromaster®

We know the soil

www.agromaster.com


KB 7
KB 9
KB 11
KB 13
KB 15
KB 17

KB, Cultivator Tubular Frame

Tubular Frame Cultivator is a secondary soil tillage machine is mounted to tractor's hydraulic lifting unit and universal three point linkagesystem, hydraulically mounted type machine. Therefore transportation to the field can be easily done. Tubular Frame Cultivators are used for preparing the soil before sowing by uprooting the weeds for to make fertilizer and preparing the seed-beds. These cultivators are manufactured as 5,7,9,11,13,15,17 tines.



One Roller

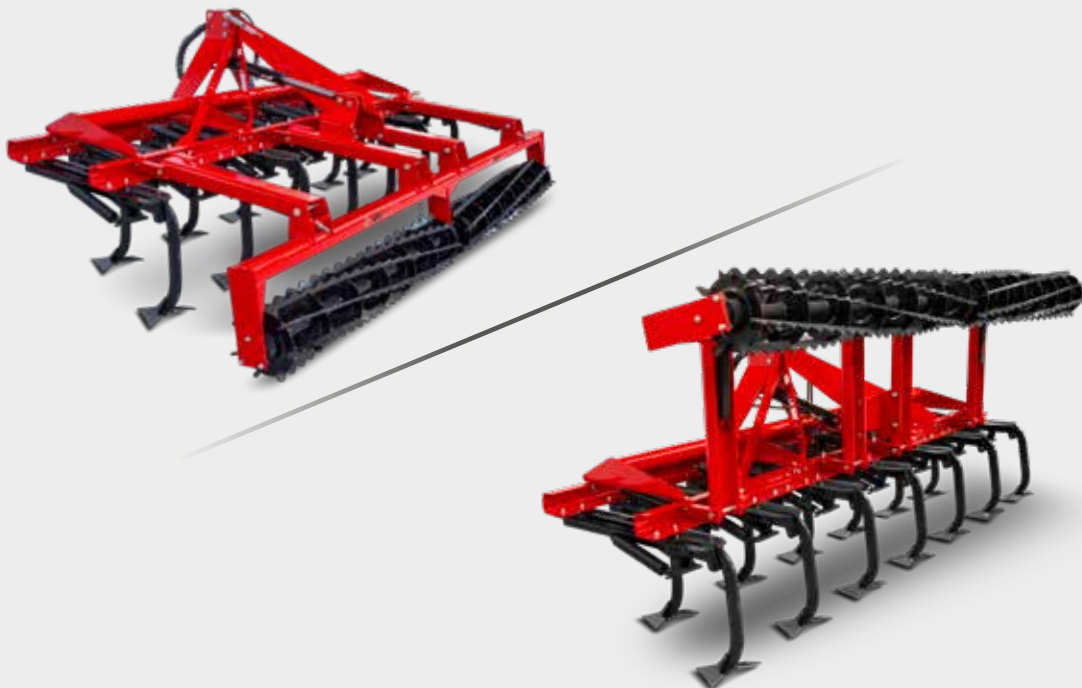


Technical Specifications*	Unit	KB 7	KB 9	KB 11	KB 13	KB 15	KB 17
Number of Tines	pcs	7	9	11	13	15	17
Total Width (W)	mm	1700	2200	2700	3200	3700	4200
	ft.in.	5'7"	7'3"	8'10"	10'6"	12'2"	13'9"
Total Length (L)	mm	850	850	850	850	850	850
	ft.in.	2'9"	2'9"	2'9"	2'9"	2'9"	2'9"
Total Height (H)	mm	1180	1180	1180	1180	1180	1180
	ft.in.	3'10"	3'10"	3'10"	3'10"	3'10"	3'10"
Working Depth (Max.)	mm	300	300	300	300	300	300
	ft.in.	12"	12"	12"	12"	12"	12"
Working Width	mm	1700	2200	2700	3200	3700	4200
	ft.in.	5'7"	7'3"	8'10"	10'6"	12'2"	13'9"
Tine Space (W1)	mm	250	250	250	250	250	250
	ft.in.	10"	10"	10"	10"	10"	10"
Required Power	hp	40-50	50-60	60-70	70-80	80-90	100-110
Total Weight	kg	220	270	320	370	440	510
	lbs	485	595	705	815	970	1124

1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inch

* Manufacturer reserves rights to change them without notice.

Double Roller

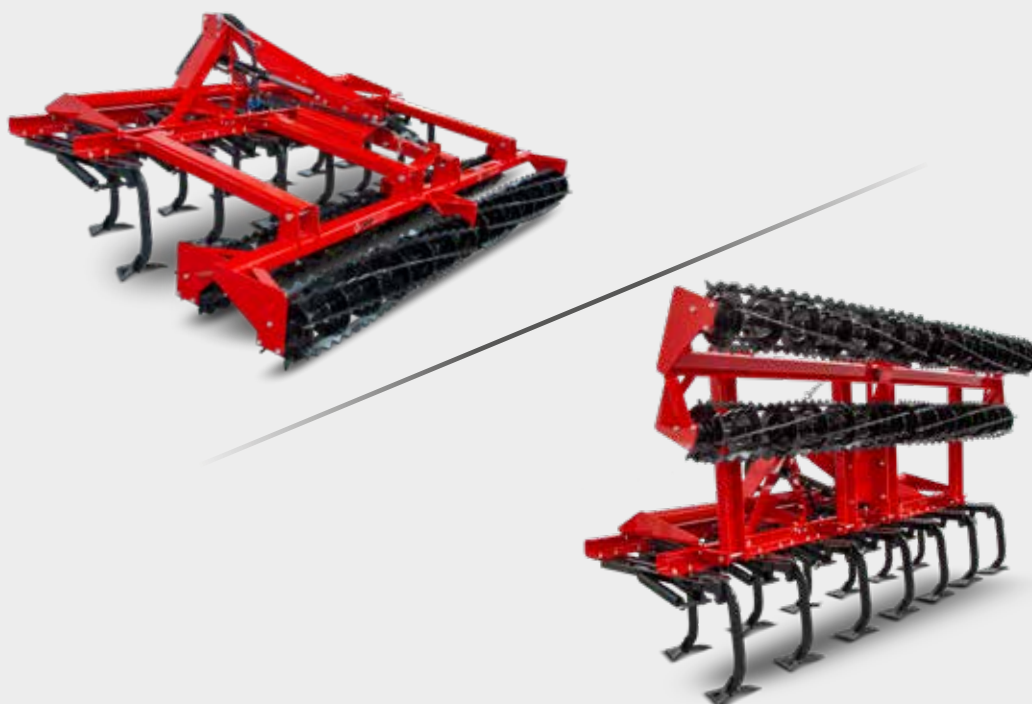



agromaster®

+90 332 235 64 23

info@agromaster.com

www.agromaster.com

Buyukkayacik OSB Mahallesi Evrenkoy Cad. No:32 42050 Selcuklu/Konya/TÜRKİYE

