

MECHANICAL INCH ADJUSTABLE
REVERSIBLE PLOUGHS

MAD



agromaster®

We know the soil

www.agromaster.com

MAD 123
MAD 143
MAD 163
MAD 124
MAD 144
MAD 164
MAD 125
MAD 145
MAD 165
MAD 146
MAD 166

MAD, Mechanical Inch Adjustable Reversible Ploughs

This reversible plough is mounted to tractor's hydraulic arms and universal three point linkage system. Plough can be easily transported to field. It is mechanically and hydraulically adjustable. Optionally, hydraulic inch adjusting system ensures to work with different working width. According to demand you can add the additionally body to the plough to increase the quantity of furrows. Damage ratio is decreased to minimum by means of the security system on the plough.



Technical Specifications*	Unit	MAD 123	MAD 143	MAD 163	MAD 124	MAD 144	MAD 164
Number of Body	pcs	3	3	3	4	4	4
Working Width	mm	900-1350	900-1350	900-1350	1200-1800	1200-1800	1200-1800
	ft .in	2'11"-4'5"	2'11"-4'5"	2'11"-4'5"	3'11"-5'10"	3'11"-5'10"	3'11"-5'10"
Working Depth	mm	260-330	250-350	300-450	260-330	250-350	300-450
	ft .in	10"-1'	10"-1'1"	11"-1'5"	10"-1'	10"-1'1"	11"-1'5"
Beam Clearance	mm	780	780-850	800-850	780	780-850	800-850
	ft .in	2'6"	2'6"-2'9"	2'7"-2'9"	2'6"	2'6"-2'9"	2'7"-2'9"
Body Distance	mm	850	850-910	910-1000	850	850	850
	ft .in	2'9"	2'9"-2'11"	2'11"-3'3"	2'9"	2'9"	2'9"
Frame Size	mm	120x100	120x100 120x120	120x100 120x120	120x100 120x120	120x100 120x120 140x140	140x140
	ft .in	4"x3"	4"x3" 4"x4"	4"x3" 4"x4"	4"x3" 4"x4"	4"x3" 4"x4" 5"x5"	5"x5"
Required Power	hp	60-90	70-100	80-110	75-115	90-130	100-140
Weight	kg	850	900	960	1000	1050	1260
	lbs	1873	1984	2116	2204	2314	2777


1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inc

* Manufacturer reserves rights to change them without notice.

Technical Specifications*	Unit	MAD125	MAD145	MAD165	MAD146	MAD166
Number of Body	pcs	5	5	5	6	6
Working Width	mm	1500-2250	1500-2250	1500-2250	1800-2700	1800-2700
	ft .in	4'11"-7'4"	4'11"-7'4"	4'11"-7'4"	5'10"-8'10"	5'10"-8'10"
Working Depth	mm	260-330	250-350	300-450	250-350	300-450
	ft .in	10"-1'	10"-1'1"	11"-1'5"	10"-1'1"	11"-1'5"
Beam Clearance	mm	780	780-850	800-850	780-850	800-850
	ft .in	2'6"	2'6"-2'9"	2'7"-2'9"	2'6"-2'9"	2'7"-2'9"
Body Distance	mm	850	850	910	850	850
	ft .in	2'9"	2'9"	2'11"	2'9"	2'9"
Frame Size	mm	120x100 120x120	120x100 120x120 140x140	120x120 140x140	140x140	140x140
	ft .in	4"x3" 4"x4"	4"x3" 4"x4" 5"x5"	4"x4" 5"x5"	5"x5"	5"x5"
Required Power	hp	100-120	115-155	130-170	140-180	160-200
Weight	kg	1150	1270	1510	1700	1925
	lbs	2535	2799	3328	3747	4243

1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inc

* Manufacturer reserves rights to change them without notice.

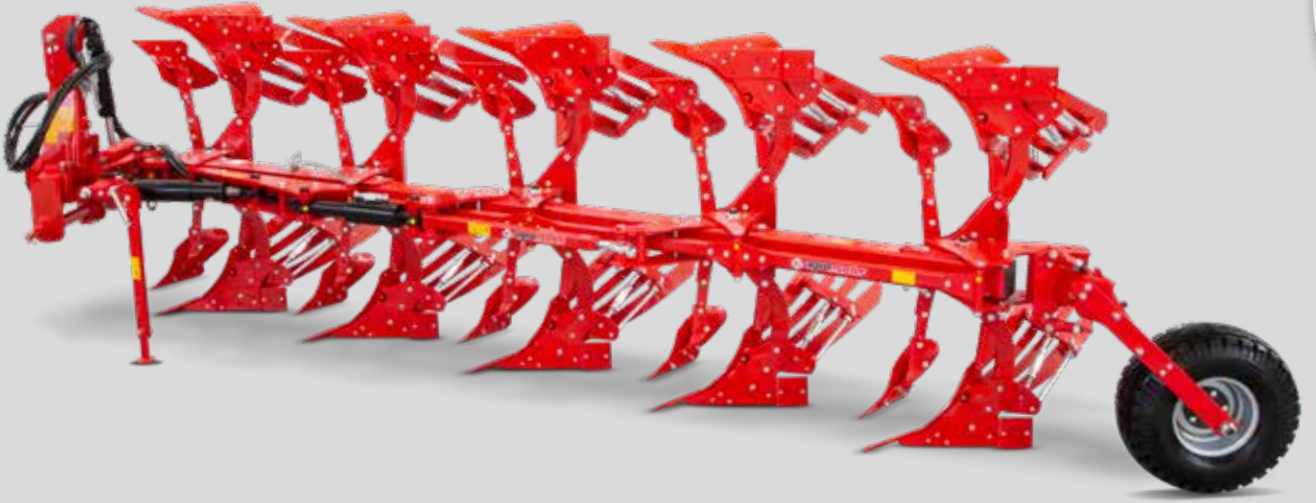

agromaster®

+90 332 235 64 23

info@agromaster.com

www.agromaster.com

Buyukkayacik OSB Mahallesi Evrenkoy Cad. No:32 42050 Selcuklu/Konya/TÜRKİYE

