

ONE ROW DISC RIDGER

SET **66-51**

SET **71-61**



agromaster®

We know the soil

www.agromaster.com

SET 66-51
SET 66-71

One Row Disc Ridger



The primary soil tillage machine is mounted and trailed from tractor's hydraulic lifting unit and universal three point linkage system. Therefore transportation to the field can be easily done. Single row set and furrow opening is made on cultivated soil by this machine. Disc connection tines can be adjusted on required dimensions. Furrow opening can be done between 20 cm and 95 cm. Furrow opening height can be adjusted to required height by means of double discs. This machine is manufactured with a mean diameter 100x100 mm chassis and the housings are with conical bearings. Discs are manufactured by boron steel and the dimensions are 660x6 mm and 560x4,5 mm. The hardness value for discs is 50-55 rh and they are durable to wear and breakage.



Technical Specifications*	Unit	SET 66-51	SET 71-61
Number of The Disc	pcs	4	4
Total Width (W)	mm	2000	2000
	ft.in.	6'6"	6'6"
Total Length (L)	mm	1100	1100
	ft.in.	3'7"	3'7"
Total Height (H)	mm	1150	1150
	ft.in.	3'9"	3'9"
Diameter of Disc	mm	660-510 (560)	710-610 (560)
	ft.in.	2'1"-1'8" (1'10")	2'3"- 2'1" (1'10")
Working Depth	mm	250-300	250-400
	ft.in.	10"-11"	10"-1'3"
Working Width	mm	200-950	200-950
	ft.in.	7"-3'1"	7"-3'1"
Space Between Legs	mm	Adj	Adj
	ft.in.		
Required Power	hp	50-60	75-80
Weight	kg	220	300
	lbs	485	661

1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inch

* Manufacturer reserves rights to change them without notice.

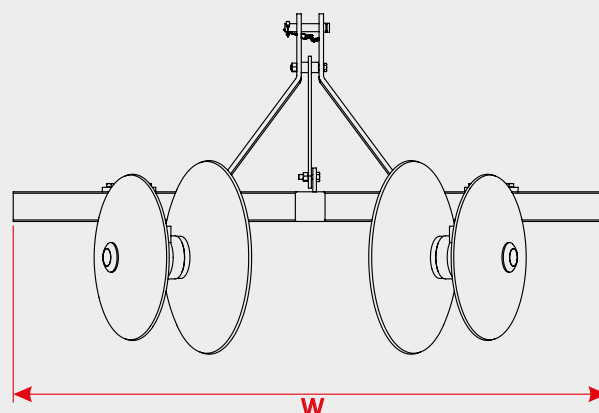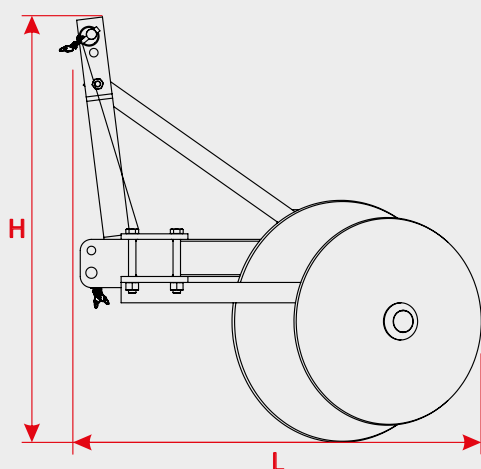



agromaster®

+90 332 235 64 23

info@agromaster.com

www.agromaster.com

Buyukkayacik OSB Mahallesi Evrenkoy Cad. No:32 42050 Selcuklu/Konya/TÜRKİYE

