

LAND LEVELLER

TK





**agromaster®**  
*We know the soil*

[www.agromaster.com](http://www.agromaster.com)

TK 200  
TK 220  
TK 250

### TK, Land Leveller

Agromaster Levelling Blades are mounted to tractors by three point linkage system. These Levelling Blades can be used in various purposes like making a field way, land levelling, opening ditches and filling. By the help of their 360° working angle they can be used in different directions. Blades are produced from special steel to prevent corrosion and breakings. Also both sides of these removable blades can be used.

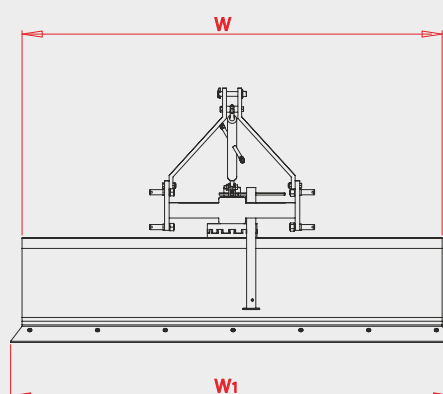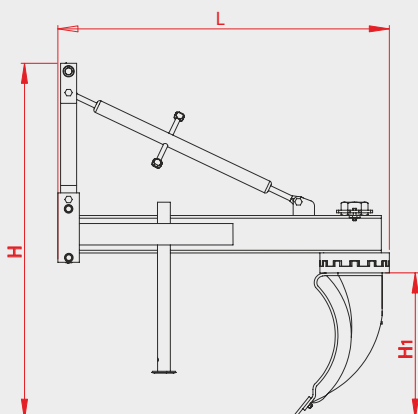

| Technical Specifications* | Unit   | TK 200 | TK 220 | TK 250 |
|---------------------------|--------|--------|--------|--------|
| Total Width (W)           | mm     | 2000   | 2200   | 2500   |
|                           | ft.in. | 6'7"   | 7'3"   | 8'2"   |
| Total Length (L)          | mm     | 1400   | 1400   | 1400   |
|                           | ft.in. | 4'7"   | 4'7"   | 4'7"   |
| Total Height (H)          | mm     | 1100   | 1100   | 1100   |
|                           | ft.in. | 3'7"   | 3'7"   | 3'7"   |
| Working Depth (max)       | mm     | 500    | 500    | 500    |
|                           | ft.in. | 20"    | 20"    | 20"    |
| Working Width (W1)        | mm     | 2120   | 2320   | 2620   |
|                           | ft.in. | 6'11"  | 7'7"   | 8'7"   |
| Turning Angle             | °      | 360    | 360    | 360    |
| Required Power            | hp     | 30-40  | 45-50  | 70-80  |
| Total Weight              | kg     | 190    | 210    | 260    |
|                           | lbs    | 418    | 462    | 573    |

1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inch

\* Manufacturer reserves rights to change them without notice.





**agromaster®**

+90 332 235 64 23

✉ info@agromaster.com

🌐 www.agromaster.com

🏠 Buyukkayacik OSB Mahallesi Evrenkoy Cad. No:32 42050 Selcuklu/Konya/TURKEY

