

## INTERROW CULTIVATOR

YCM / YCMF



**agromaster®**

*We know the soil*


[www.agromaster.com](http://www.agromaster.com)

**YCM / YCMF 3**  
**YCM / YCMF 5**  
**YCM / YCMF 6**  
**YCM / YCMF 7**  
**YCM / YCMF 9**

**YCM, Series Interrow Rotary Cultivator, Without Fertilizer**  
**YCMF, Series Interrow Rotary Cultivator, With Fertilizer**

The primary soil tillage machine is mounted from tractor's hydraulic lifting unit and universal three point linkage system. Therefore transportation to the field can be easily done. Machine is produced as 3, 5, 7, 9, 11, 13, 15, 17 and 19 rows and used for hoeing of plants. Detrimental effect of weeds on the plants starts 1-1,5 months later from the planting date. The machine is used for rising of soil and weeding during the growing period of plants. This process accelerates growing of the plants. Row space of machine is adjustable and fertilizing mechanism can be added according to demand.



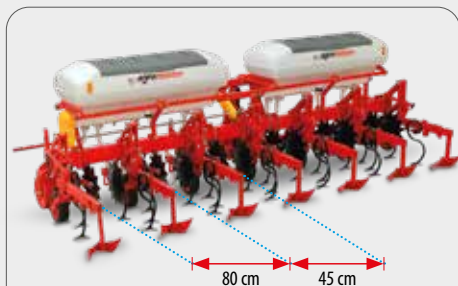


Changeable Space Between Rows




Lid system discharge all fertilizer in the ho



Precision Fertilizer Application Norm

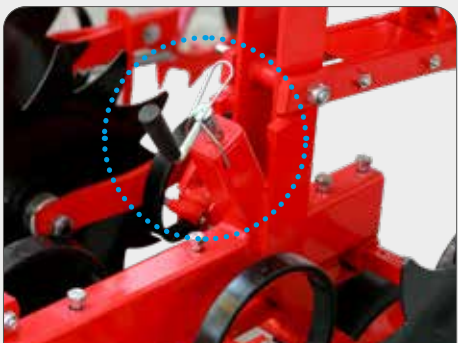

Depth Adjustment

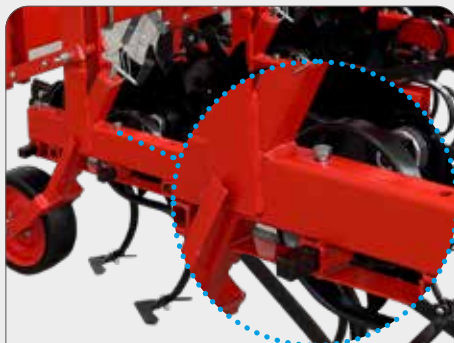

Tines Distance Adjustment



Unit Locking Adjustment



Balance Wheel Adjustment



Star Disc Adjustment



Optional Star Type Closer Disc





Optional Canal Opener



Optional Roller Force Adjustment



Optional rear roller provide to crumbling the soil and smooth soil surface.

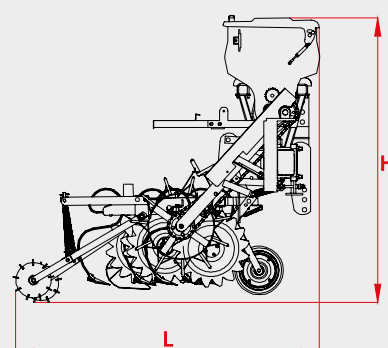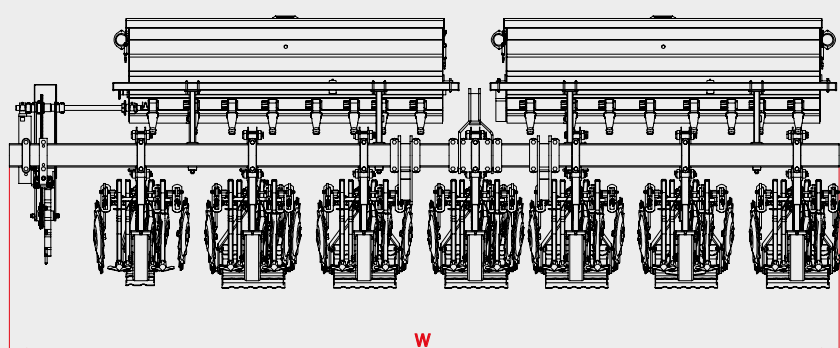

## Without Fertilizer Hopper

| Technical Specifications* | Unit   | YCM 3      | YCM 5     | YCM 6     | YCM 7     | YCM 9     |
|---------------------------|--------|------------|-----------|-----------|-----------|-----------|
| Number of Units           | pcs    | 3          | 5         | 6         | 7         | 9         |
| Number of Tines           | pcs    | 13         | 21        | 26        | 31        | 41        |
| Total Width (W)           | mm     | 2070       | 3000      | 3000      | 4500      | 6000      |
|                           | ft.in. | 6'10"      | 9'10"     | 9'10"     | 14'9"     | 19'8"     |
| Total Length (L)          | mm     | 2300       | 2300      | 2300      | 2300      | 2300      |
|                           | ft.in. | 7'7"       | 7'7"      | 7'7"      | 7'7"      | 7'7"      |
| Total Height (H)          | mm     | 950        | 950       | 950       | 950       | 950       |
|                           | ft.in. | 3'1"       | 3'1"      | 3'1"      | 3'1"      | 3'1"      |
| Working Width             |        | Adjustable |           |           |           |           |
| Space Between Units       | mm     | 450-800    | 450-800   | 450-800   | 450-800   | 450-800   |
|                           | ft.in. | 1'6"-2'7"  | 1'6"-2'7" | 1'6"-2'7" | 1'6"-2'7" | 1'6"-2'7" |
| Required Power            | hp     | 45         | 55        | 60        | 75        | 90        |
| Total Weight              | kg     | 505        | 620       | 690       | 790       | 1100      |
|                           | lbs    | 1113       | 1366      | 1521      | 1741      | 2425      |

## With Fertilizer Hopper

| Technical Specifications*  | Unit<br>Ед.изм. | YCMF 3     | YCMF 5    | YCMF 6    | YCMF 7    | YCMF 9    |
|----------------------------|-----------------|------------|-----------|-----------|-----------|-----------|
| Number of Units            | pcs             | 3          | 5         | 6         | 7         | 9         |
| Number of Tines            | pcs             | 13         | 21        | 26        | 31        | 41        |
| Total Width (W)            | mm              | 2070       | 3300      | 3300      | 4800      | 6300      |
|                            | ft.in.          | 6'10"      | 10'10"    | 10'10"    | 15'9"     | 20'8"     |
| Total Length (L)           | mm              | 2300       | 2300      | 2300      | 2300      | 2300      |
|                            | ft.in.          | 7'7"       | 7'7"      | 7'7"      | 7'7"      | 7'7"      |
| Total Height (H)           | mm              | 1450       | 1450      | 1450      | 1450      | 1450      |
|                            | ft.in.          | 4'9"       | 4'9"      | 4'9"      | 4'9"      | 4'9"      |
| Working Width              |                 | Adjustable |           |           |           |           |
| Space Between Units        | mm              | 450-800    | 450-800   | 450-800   | 450-800   | 450-800   |
|                            | ft.in.          | 1'6"-2'7"  | 1'6"-2'7" | 1'6"-2'7" | 1'6"-2'7" | 1'6"-2'7" |
| Fertilizer Hopper Capacity | dm <sup>3</sup> | 210x1      | 175x2     | 175x2     | 280x2     | 400x2     |
| Required Power             | hp<br>лс        | 55         | 65        | 70        | 85        | 100       |
| Total Weight               | kg              | 605        | 800       | 870       | 970       | 1250      |
|                            | lbs             | 1333       | 1763      | 1918      | 2138      | 2755      |

1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inch

\* Manufacturer reserves rights to change them without notice.

[illegible]

## NOTES

[illegible]



**agromaster®**

+90 332 235 64 23 ✉ info@agromaster.com 🌐 www.agromaster.com

🏠 Buyukkacacik Mahallesi Org. San. Bolgesi Evrenkoy Cad. No:32 Selcuklu/Konya/TURKEY

