

DISC RIDGER

SET 466



agromaster®

Nous connaissons le sol

www.agromaster.com

SET 466**SET 466, Disc Ridger**




These Ridgers are mounted to tractor's hydraulic arms and linkage system. So it is very easy to transport these ridgers to field. These machines are used for making one and two rows ridgers and opening canal. According to user's wishes discs angels can be arranged (0-23°) to make canal or ridge. Also disc connection legs of machine can be arranged 20°-50°. By means of the adjustable legs of machine row spaces of canals and ridges can be adjusted 45-100 cm.



Technical Specifications*	Unit	SET 466
Number of The Disc	pcs	4
Total Width (W)	mm	1150
	ft.in.	3'9"
Total Length (L)	mm	2700
	ft.in	9'
Total Height (H)	mm	1460
	ft.in	4'10"
Diameter of Disc	mm	660
	ft.in	26"
Working Depth	mm	250
	ft.in.	10"
Working Width	mm	1050
	ft.in.	41"
Space Between Legs	mm	Adjustment
	ft.in.	
Required Power	hp	60-70
Weight	kg	410
	lbs	903

1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inch

* Manufacturer reserves rights to change them without notice.

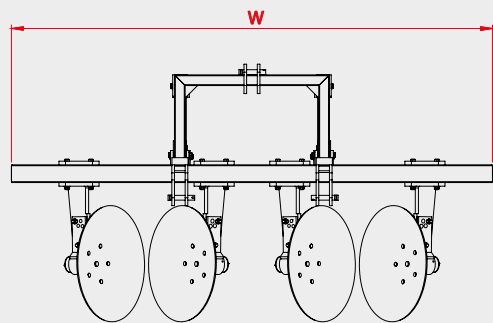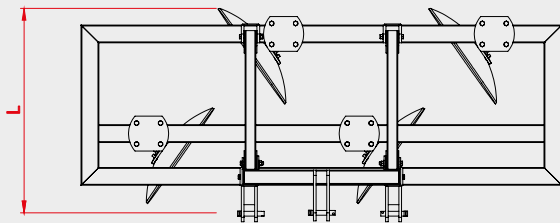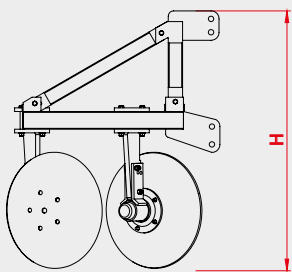



agromaster®

+90 332 235 64 23

info@agromaster.com

www.agromaster.com

Buyukkayacik OSB Mahallesi Evrenkoy Cad. No:32 42050 Selcuklu/Konya/TÜRKİYE

