

FIELD SPRAYER, TRAILED TYPE MISTBLOWER

CANON P




agromaster®

We know the soil

www.agromaster.com

CANON 2000 P
CANON P FIELD SPRAYER, TRAILED TYPE MISTBLOWER

Canon P Trailed type 2000 P ltr mistblower connected to the drawbar of tractor and getting drive from (P.T.O) are used for multipurpose plant protection.

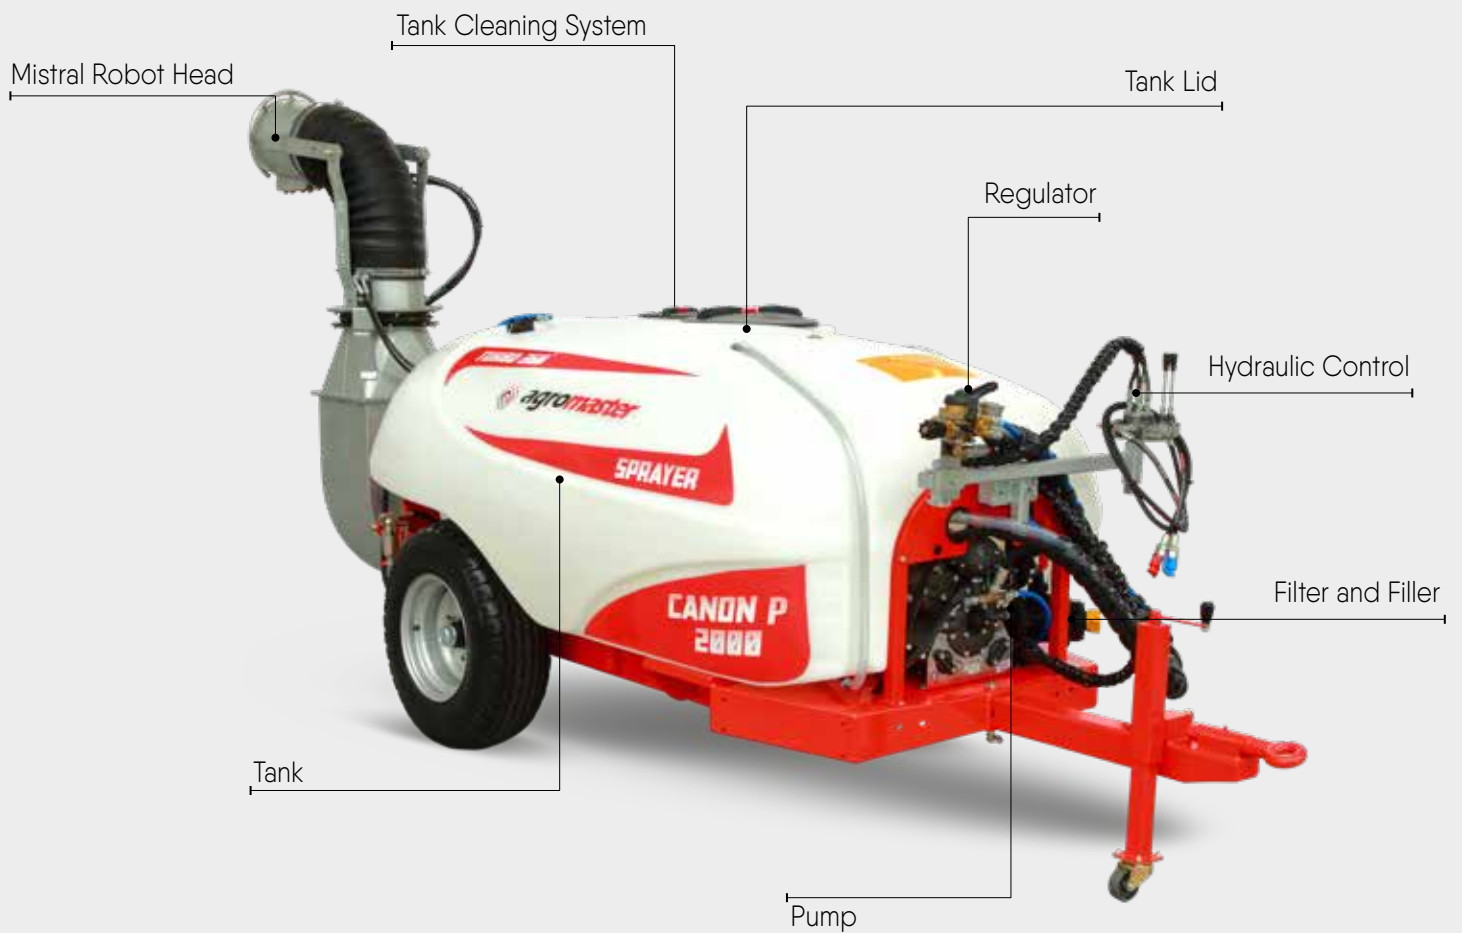


Trailed Type

Technical Specifications*	Unit	CANON 2000 P
Capacity	L	2000
	gallon	528
Total Width (W)	mm	3950
	ft.in	12'12"
Total Length (L)	mm	1550
	ft.in	5'1"
Total Height (H)	mm	2200
	ft.in	7'3"
Pump Type		C 145/ membrane
Pump Flowrate	L/min	145
Pump Pressure	bar	50
Air Flow	m ³ /h	66000
Number of Nozzles	pcs	5+5
Nozzles		atomizer brass with stopper
Working Width	m	40-45
	ft.in	131'-147'
Regulator Model		OTR
Pressure Safety Valve		standard
Tank Mixer		standard
Tank Clean System		standard
Tank Material		polyethylene
PTO Rotation	rpm	540
Horizontal Rotation	degree	270
Vertical Rotation	degree	90
Required Power	hp	75-100
Total Weight	kg	1305
	lbs	2877

1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inch

* Manufacturer reserves rights to change them without notice.

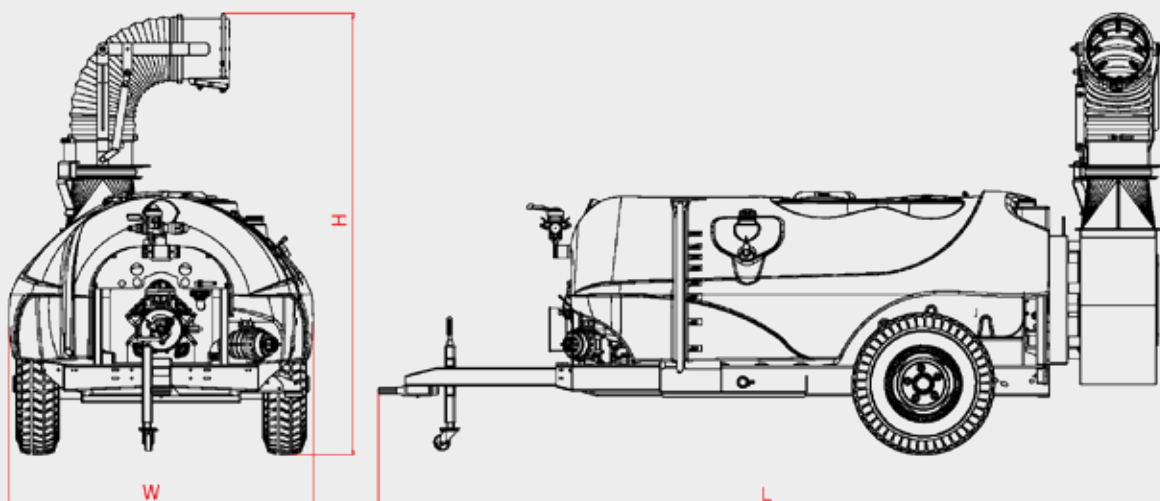

STANDARD FEATURES

For Canon P



By the help of pressure regulator right or left spraying and the pressure adjustment can be made.



Hydromotor providing 270° working angle.



Hydraulic spraying height adjustment



Cleanable Filter



Best quality 4 membrane C145 pump which is produced by our factory is the most efficient product in its segment.



Angle Adjustable Nozzle



Hand Washing Tank



By means of filter system blockages are prevented.



Tank Cleaning System

For Canon P




Angle Adjustable Nozzle

Nozzle Spraying Types


Atomizer Nozzle

Plate hole diameter

0.8 mm
1.0 mm
1.2 mm
1.5 mm
1.8 mm

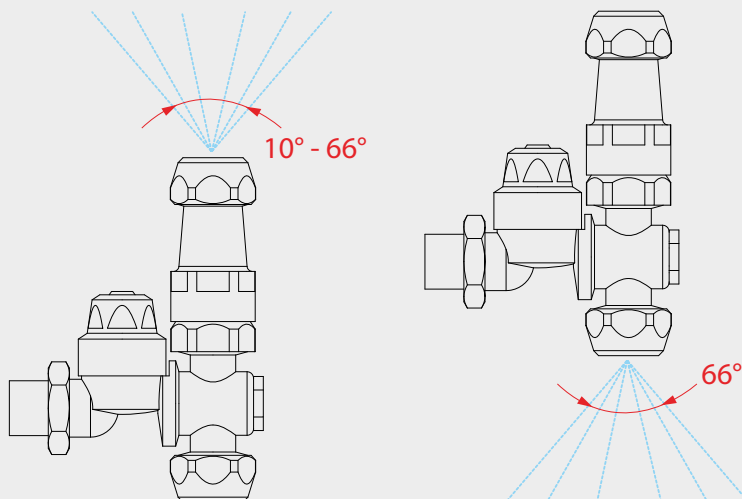

Canon 2000 P - Spraying Types

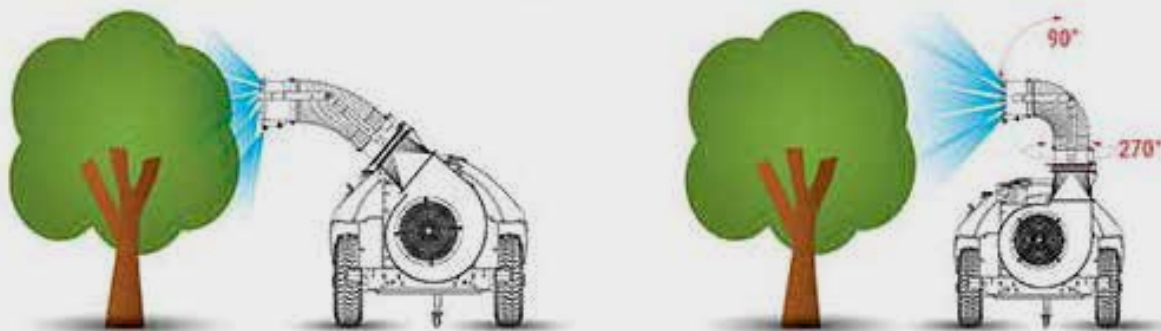



agromaster®

+90 332 235 64 23

info@agromaster.com

www.agromaster.com

Buyukkayacik OSB Mahallesi Evrenkoy Cad. No:32 42050 Selcuklu/Konya/TÜRKİYE

