

MISTBLOWER, MOUNTED TYPE

COBRA F



agromaster®

We know the soil

www.agromaster.com

COBRA F SERIES

Field Sprayer, Mounted Mistblower

Mounted type 400, 600, 800, 1000 ltr. Cobra F Series mistblowers connected to the three point of linkage of tractor and getting drive from (P.T.O) are used for multipurpose plant protection. Spraying pump is getting the power from P.T.O. and deliver the liquid under the pressure to nozzles on the spray fan.



COBRA F 400
COBRA F 600
COBRA F 800
COBRA F 1000

COBRA F FIELD SPRAYER, MOUNTED MISTBLOWER



Cobra F Mounted type 400, 600, 800, 1000 ltr. Cobra F Series mistblowers connected to the three point of linkage of tractor and getting drive from (P.T.O) are used for multipurpose plant protection. Spraying pump is getting the power from P.T.O. and deliver the liquid under the pressure to nozzles on the spray fan.



Technical Specifications*	Unit	COBRA F 400	COBRA F 600	COBRA F 800	COBRA F 1000
Capacity	L	400	600	800	1000
	gallon	105	158	211	264
Total Width (W)	mm	1400	1450	1750	1750
	ft.in	4'7"	4'9"	5'8"	5'8"
Total Length (L)	mm	1650	1650	1650	1650
	ft.in	5'4"	5'4"	5'4"	5'4"
Total Height (H)	mm	1300	1500	1550	1750
	ft.in	4'3"	4'11"	5'1"	5'9"
Pump Type		C 96 / membrane			
Pump Flowrate	L/min	96			
Pump Pressure	bar	50			
Air Flow	m ³ /h	54000			
Fan Diameter Ø	mm	750			
	ft.in	2'6"			
Number of Nozzles	pcs	5+5			
Working Width	m	16			
	ft.in	52'			
Regulator Model		OSR			
Pressure Safety Valve		Standard			
Tank Mixer		Standard			
Tank Material		Polyethylene			
PTO Rotation	rpm	540			
Hand Washing Tank	L	5			
	gallon	1			
Tank Washing System	L	60	60	100	100
	gallon	15	15	26	26
Required Power	hp	60-70	70-80	90-120	
Total Weight	kg	250	275	320	330
	lbs	551	606	705	727

1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inch

* Manufacturer reserves rights to change them without notice.

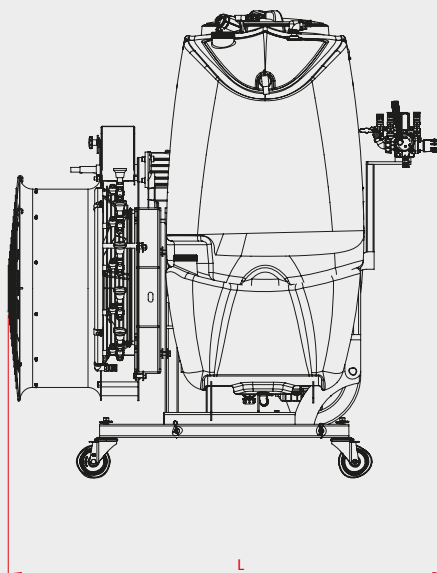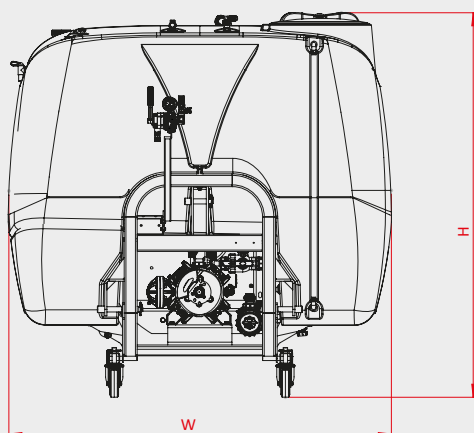

STANDARD FEATURES



Hand Washing Tank



Tank Lid



Tank Cleaning System



By the help of pressure regulator right or left spraying and the pressure adjustment can be made.



Best quality 4 membrane C96 pump which is produced by our factory is the most efficient product in its segment.




Cleanable Filter



Angle Adjustable Nozzle



Transmission System

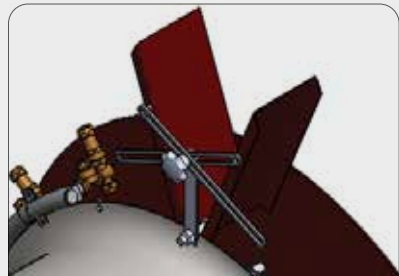

Provide Routing During Operation

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

[illegible]



agromaster®

+90 332 235 64 23

info@agromaster.com

www.agromaster.com

Buyukkayacik OSB Mahallesi Evrenkoy Cad. No:32 42050 Selcuklu/Konya/TÜRKİYE

