

FERTILIZER SPREADER
РАЗБРАСЫВАТЕЛЬ УДОБРЕНИЙ
FIRTINA



agromaster®

We know the soil


www.agromaster.com

ACHIEVE


Extremely Precise And Safe Spread Pattern
with fertilizer spreader

► FIRTINA







Equal and Serial Spread




Mounted and Trailed Options

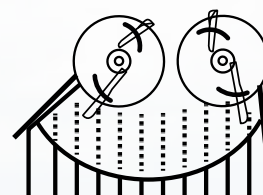

Adjustable Disc



Compatibility With Different Fertilizer Sizes



Different Capacity



Agromaster hereby reserves the right to introduce changes in the offer, especially to withdraw products from sale or change specifications without prior notice.

Our company is not responsible for typographical error.

Product visuals may differ from reality.

www.agromaster.com

Optimum and Right Result with
FIRTINA
Fertilizer Spreader



FIRTINA 900
FIRTINA 1200
FIRTINA 1500
FIRTINA 3000

Firtina, Fertilizer Spreader, Mounted

Firtina, Разбрасыватель Удобрений Навесной

FIRTINA model Fertilizer Spreaders are produced with double discs, 900, 1200 and 1500 liters capacities and 18-24,

24-36 m working width. These mounted type fertilizer spreaders are mounted to tractor's universal three point linkage system and hydraulic top link. Spreading discs made from stainless steel material. Horizontal mixer provides falling of fertilizer onto spreading discs



easily. Fertilizer spreading degree can be easily adjusted by means of hydraulic lift. When fertilizing the agricultural fields surrounding, the limiter mounted on the machine enables the prevention of fertilizing out of the field. The limiter prevents the mineral fertilizer to harm the environment and enables the most efficient use of the fertilizer. The limiter can be mounted on the right or left side of the machine. It would be sufficient to use the limiter on just one side.

Разбрасыватель Удобрений, FIRTINA производится с двумя дисками, вместимостями 900, 1200, 1500 л и ширинами захвата, 18-24, 24-36 м. Разбросные диски, сделаны из нержавеющей стали. Горизонтальный миксер обеспечивает свободное падение удобрения на диски. Норму внесения удобрения можно регулировать посредством гидравлики.



Technical Specifications* Техническая Характеристика	Unit Ед.изм.	FIRTINA 900	FIRTINA 1200	FIRTINA 1500	FIRTINA 3000
Hopper Capacity Вместимость бункера	л/л	900	1200	1500	3000
	gallon/галлон	237	317	396	792
Number of Disc Количество дисков	pcs/шт.	2	2	2	2
Working Width Ширина захвата	м/м	18-24 / 59'-79'	18-24 / 59'-79'	18-24 / 59'-79'	18-24 / 59'-79'
	ft.in./фут. дюйм	24-36 / 79'-118'	24-36 / 79'-118'	24-36 / 79'-118'	24-36 / 79'-118'
Total Width (W) Общая ширина	mm/мм	2300	2300	2300	2500
	ft.in./фут. дюйм	7'7"	7'7"	7'7"	8'2"
Total Length (L) Общая длина	mm/мм	1420	1420	1420	1420
	ft.in./фут. дюйм	4'8"	4'8"	4'8"	4'8"
Total Height (H) Общая высота	mm/мм	1040	1240	1450	1600
	ft.in./фут. дюйм	3'5"	4'1"	4'9"	
Category Категория		II	II	II - III	III
Transmission Type Редуктор		1/1	1/1	1/1	1/1
Mixing System Смешивающая система		Horizontal			
PTO Rotation Частота оборотов ВОМ	rpm об/мин	540			
Required Power Необходимая мощность	hp л.с.	85-90	95-100	110-130	150-160
Total Weight Общая масса	kg/кг	380	398	420	540
	lbs/фунт	837	877	925	1190

1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inch * Manufacturer reserves rights to change them without notice./ * Производитель оставляет за собой право изменять их без уведомления.

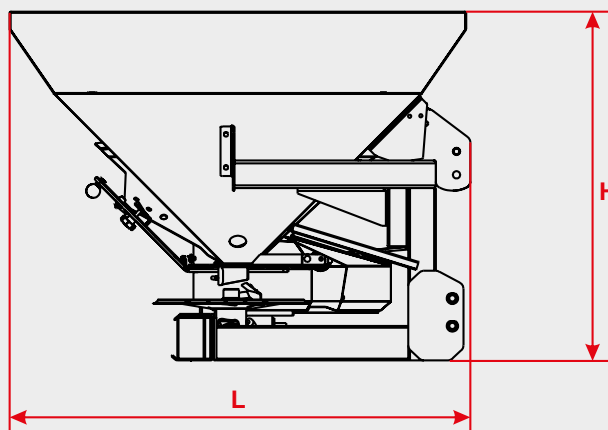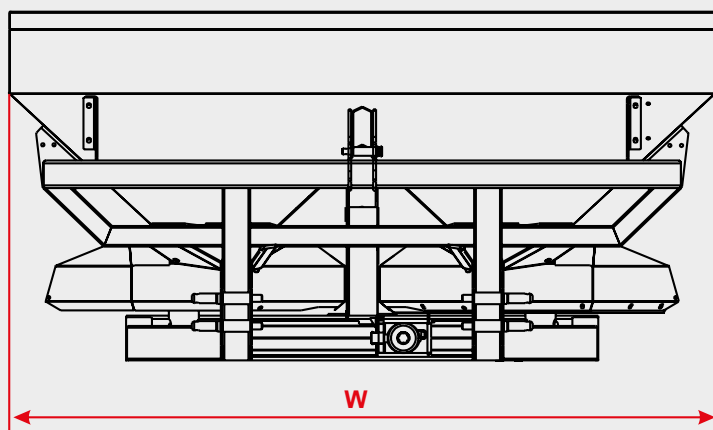

STANDARD FEATURES



Spread rate chart
Шкала нормы внесения



Stainless steel discs with adjustable vanes
Нержавеющие диски с регулируемыми лопастями



Horizontal type gearbox
Горизонтальный редуктор



Hydraulic control vents
Гидравлические вентили



Reflector
Отражатель



Tent - Палатка



agromaster®

+90 332 235 64 23

info@agromaster.com

www.agromaster.com

Buyukkayacik OSB Mahallesi Evrenkoy Cad. No:32 42050 Selcuklu/Konya/TURKEY

