



MISTBLOWER

TAS



agromaster®

We know the soil

www.agromaster.com

EFFECTIVE RESULT

IN FRUIT GARDENS, VINEYARDS AND CULTIVATED FIELDS


Spraying pump is getting the power from P.T.O. and deliver the liquid under the pressure to nozzles on the spray fan. Propeller getting drives by PTO provide pressured air release in the field. Release of the pressured air direction can be adjusted by guide wings. By means of this facility, pressured air can spray effectively



TAS 1200
TAS 1600
TAS 2000

TAS FIELD SPRAYER, TRAILED TYPE MISTBLOWER


TAS Trailed type 1200, 1600, 2000 ltr mistblower connected to the drawbar of tractor and getting drive from (P.T.O) are used for multipurpose plant protection. Spraying pump is getting the power from P.T.O. and deliver the liquid under the pressure to nozzles on the spray fan. Propeller getting drives by PTO provide pressured air release in the field. Release of the pressured air direction can be adjusted by guide wings.

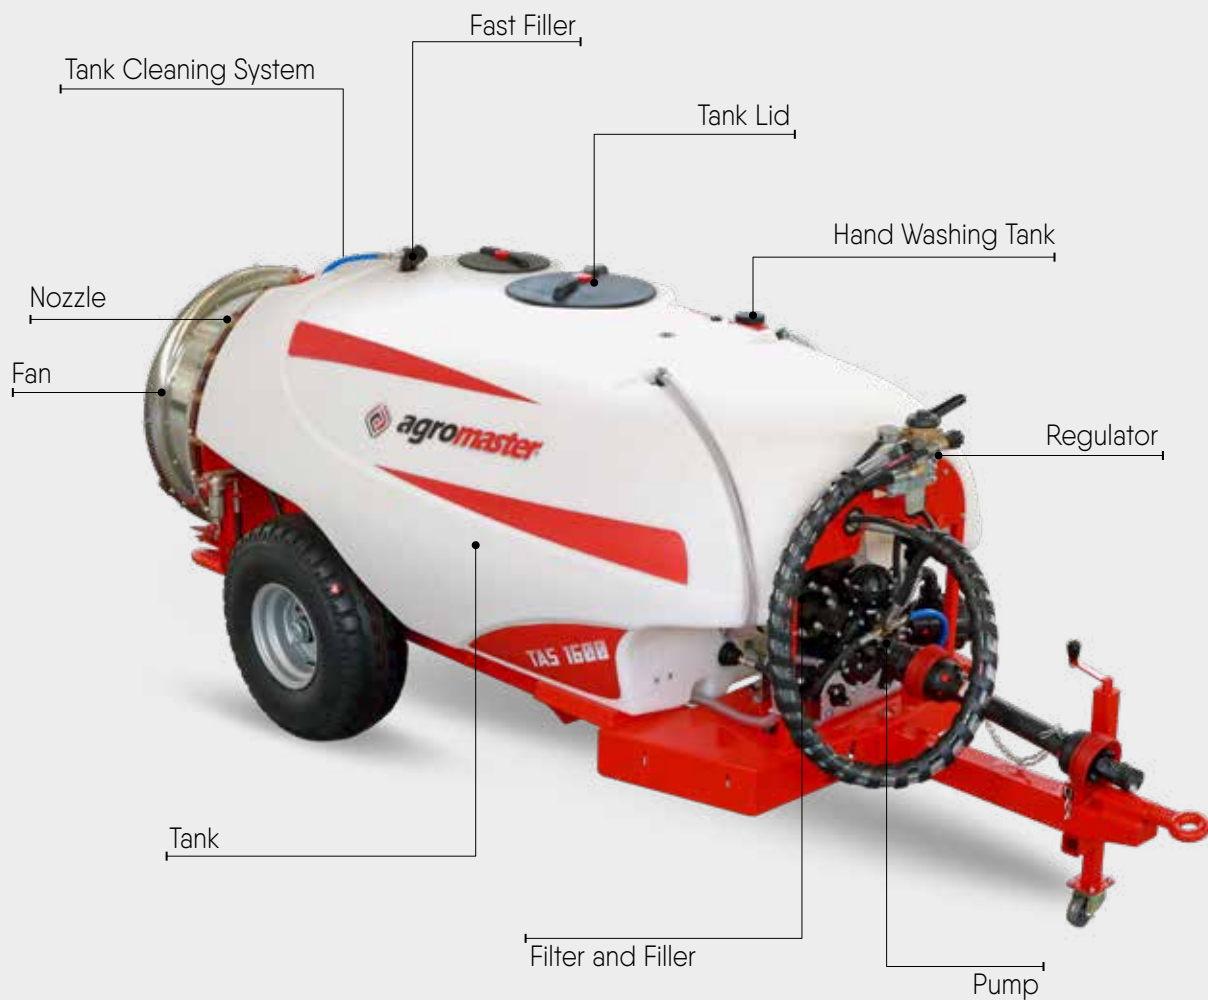

Technical Specifications*	Unit	TAS 1200	TAS 1600	TAS 2000
Capacity	L	1200	1600	2000
	gallon	317	422	528
Total Width (W)	mm	1750	1750	1750
	ft.in	5'9"	5'9"	5'9"
Total Length (L)	mm	3750	4000	4250
	ft.in	12'4"	13'1"	13'11"
Total Height (H)	mm	1400	1600	1600
	ft.in	4'7"	5'3"	5'3"
Pump Type		C 145 /membrane		
Pump Flowrate	L/min	145		
Pump Pressure	bar	50		
Air Flow	m ³ /h	66000		
Fan Diameter Ø	cm	90		
	ft.in	2'11"		
Number of Nozzles	pcs	8+8		
Working Width	m	20		
	ft.in	79'		
Regulator Model		OTR		
Pressure Safety Valve		standard		
Tank Mixer		standard		
Tank Material		fiberglass/polyethylene		
PTO Rotation	rpm	540		
Required Power	hp	60-80	70-90	75-100
Total Weight	kg	650	670	710
	lbs	1433	1477	1565

1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inch


* Manufacturer reserves rights to change them without notice.

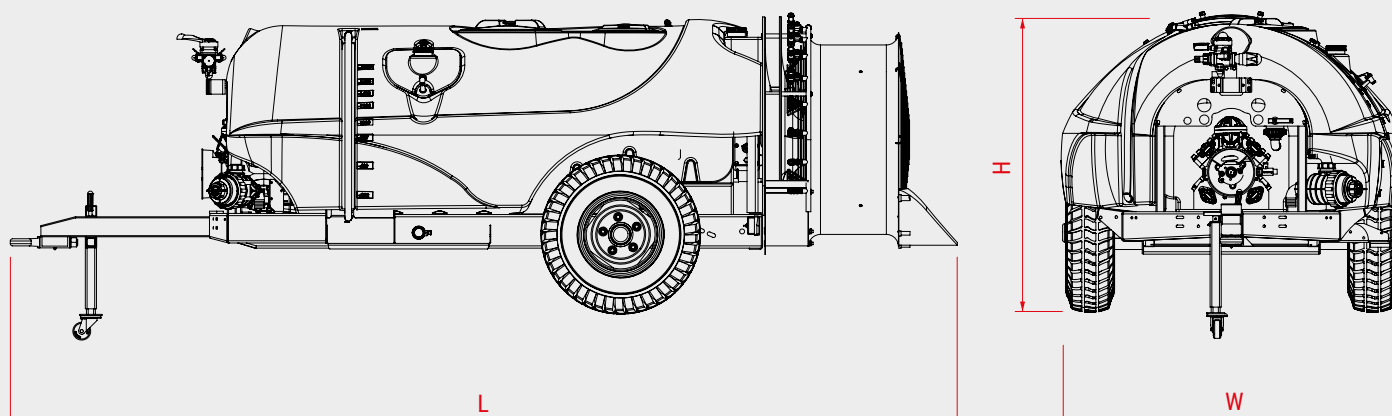

STANDARD FEATURES



Cleanable Filter

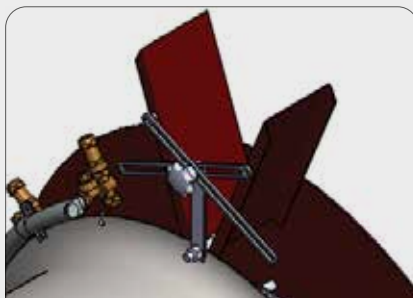

Provide Routing During Operation



By means of filter system blockages are prevented.



Angle Adjustable Nozzle



Transmission System



Ladder for easy acces




Best quality 4 membrane C145 pump which is produced by our factory is the most efficient product in its segment.




By the help of pressure regulator right or left spraying and the pressure adjustment can be made.


Nozzle Spraying Types

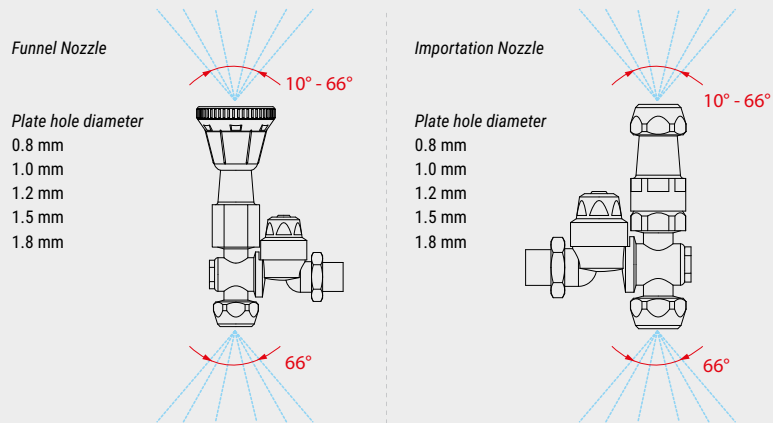

Machine Spraying Types

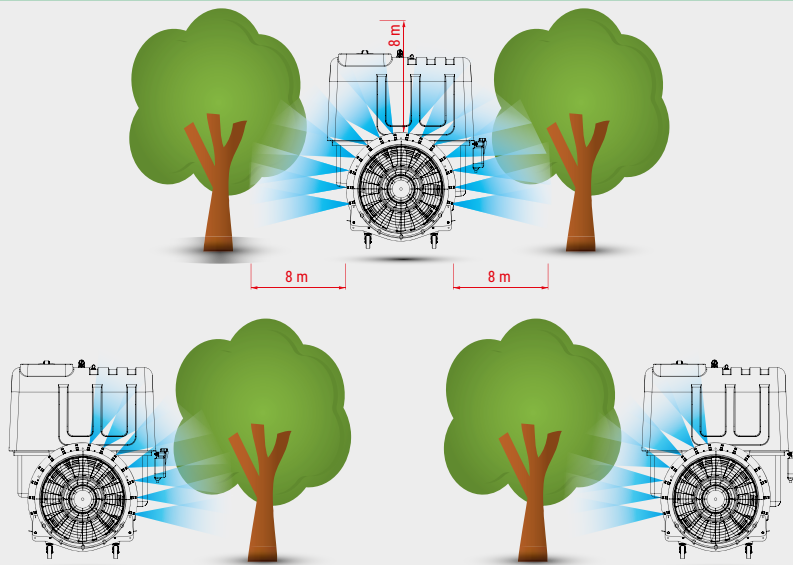

Machine Spraying Types

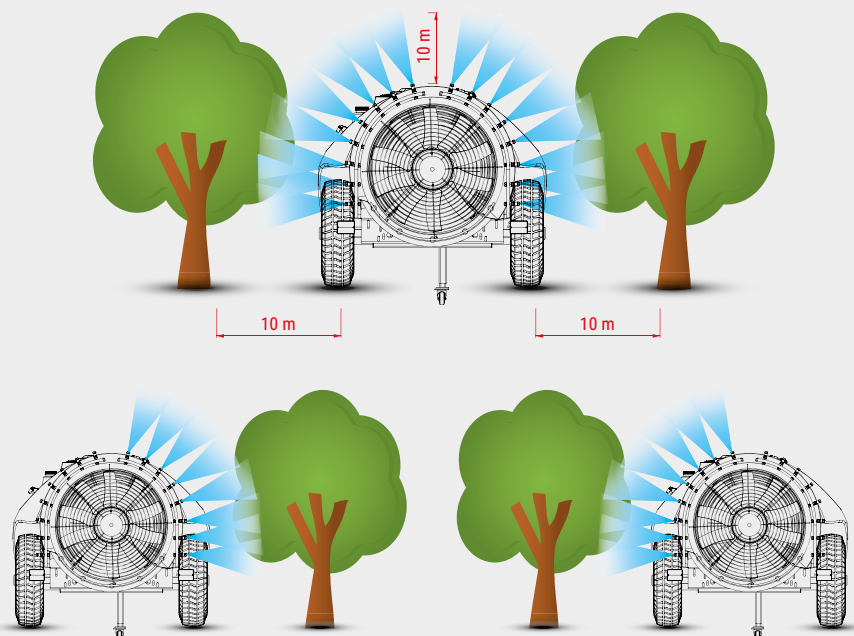

NOTES

This image shows a full page of a document template designed for handwritten notes or essays. It features approximately 30 evenly spaced, thin grey horizontal lines across the entire width of the page. The margins are consistent on all sides, providing ample space for writing. There are no titles, headers, or other markings present on the page.



agromaster®

+90 332 235 64 23

info@agromaster.com

www.agromaster.com

Buyukkayacik OSB Mahallesi Evrenkoy Cad. No:32 42050 Selcuklu/Konya/TÜRKİYE

