

FERTILIZER SPREADERS WITH SUBSOILER

BAF



agromaster®

We know the soil

www.agromaster.com

**BAF 160
BAF 200**
BAF, Fertilizer Spreaders With Subsoiler

Subsoil Fertilizer Spreaders with two fertilizing tines are mounted to tractor by three point linkage system. Space between tines is adjustable. If required, spreading mechanism of one of the tines can be closed to work with one tine. These spreaders are used to apply fertilizers into subsoil in vineyards and fruit gardens.


STANDARD FEATURES


Hydraulic shut off ventils





Spread rate chart

Technical Specifications*	Unit	BAF 160	BAF 200
Hopper Capacity	lt	300	300
	gallon	79	79
Number of Disc	pcs	2	2
Working Width	mm	1200-1400-1600	1600-2000
	ft.in.	3'11"/4'7"/5'3"	5'3"/6'7"
Total Width (W)	mm	1350/1750	1750/2150
	ft.in.	4'5"/5'9"	5'9"/7'1"
Total Length (L)	mm	1350	1350
	ft.in.	4'5"	4'5"
Total Height (H)	mm	1300	1300
	ft.in.	4'3"	4'3"
Category		I-II	II
Space Between Tines		1200-1600	1600-2000
Transmission Type		1/1	1/1
Mixing System		Vertical	
PTO Rotation	rpm	540	
Required Power	hp	40-70	60-75
Total Weight	kg	288	300
	lbs	634	661

1 inch = 25,4 mm - 1 inch = 0,083 feet (foot) - 1 feet (foot) = 12 inch

* Manufacturer reserves rights to change them without notice.

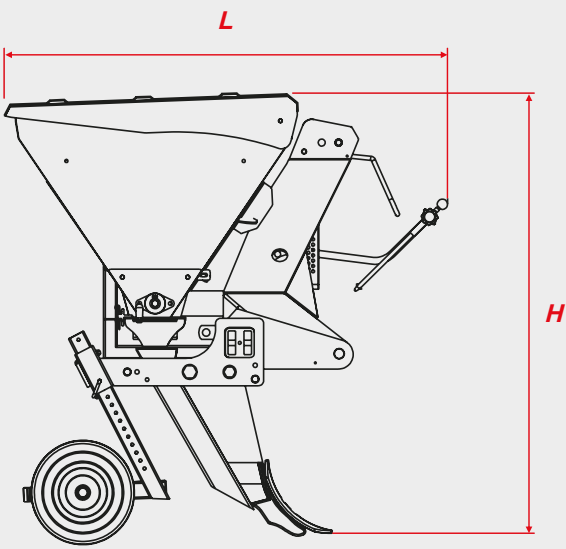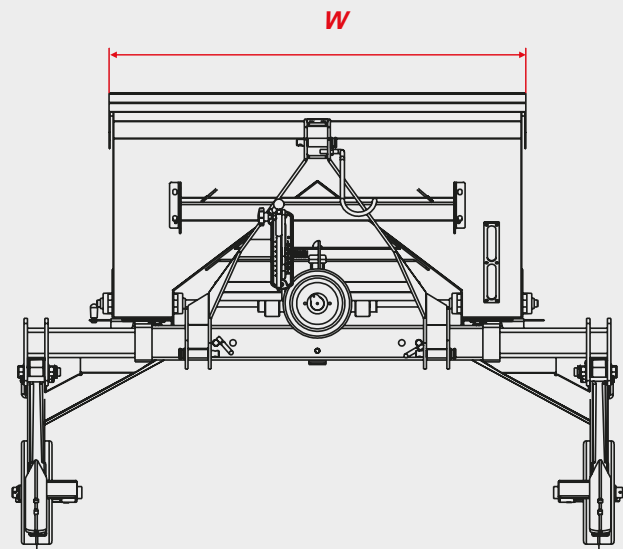



agromaster®

+90 332 235 64 23

info@agromaster.com

www.agromaster.com

Buyukkayacik OSB Mahallesi Evrenkoy Cad. No:32 42050 Selcuklu/Konya/TURKEY

